

# AMPHIBIO 1500

## Engine

	HONDA GXV 390	Briggs & Stratton
Type:	4-strokes air cooled gasoline engine	4-stroke
Piston displacement:	389 ccm	344 ccm
Authorized output:	13 HP	13 HP
Fuel Tank:	2.1 l	2.1 l
Fuel consumption:	2.5 l/hour at 3,000 rpm	2.5 l/hour at 3,000 rpm
Starting system:	Pull rope	Pull rope
Valve mechanism:	OHV	OHV

## Pump


	HONDA GXV 390	Briggs & Stratton
Type:	Single suction, centrifugal	Single suction, centrifugal
Outlet:	B75	B75
Performance:	1500 l/min	1500 l/min
Delivery height:	55 m	55 m
Grains:	max 15 mm	max 15 mm

## Dimensions and weight

	HONDA GXV 390	Briggs & Stratton
Dimensions (l x w x h):	860 x 750 x 525 mm	860 x 750 x 480 mm
Weight:	56 kg	50 kg

<b>Float</b>	Impact resistance polyethylene	Impact resistance polyethylene
<b>Optional</b>	External fuel tank (8 l), bronze impeller, special bottom strainer	External fuel tank (8 l), bronze impeller, special bottom strainer
<b>Operation time with external fuel tank</b>	up to 4 hours	up to 4 hours

Performance graph

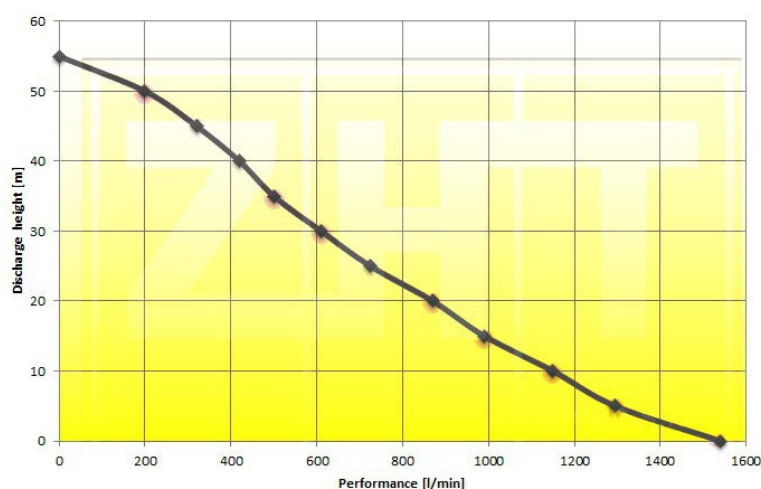

**PORTABLE FLOATING PUMPS**